


FF/120/MD/BF/BL

SUITABLE FOR WALLS & CEILINGS

FLIPFIX™

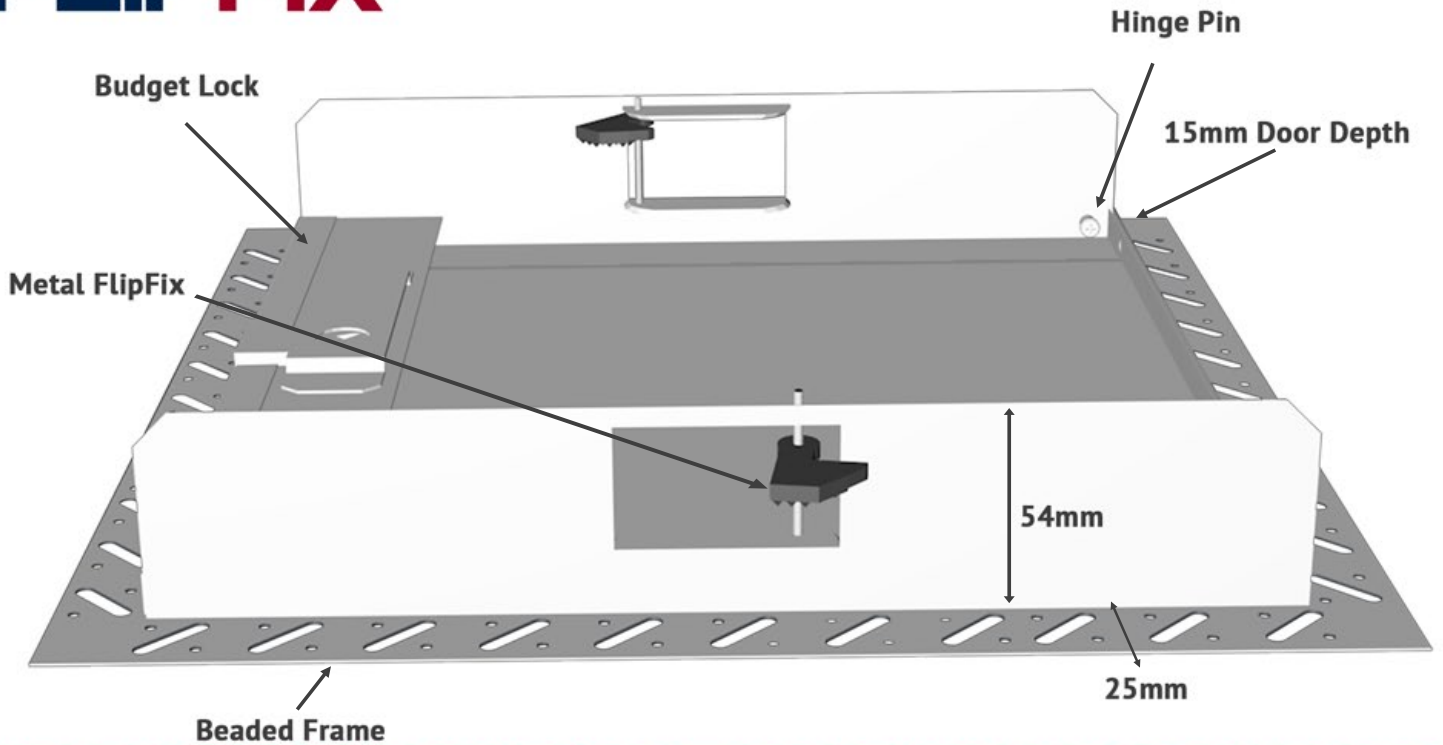

Description

The FLIPFIX MD has a metal faced door and is designed to fit straight into a pre-cut hole using the 'pop-out' cutting template provided. The Panel has a 25mm Beaded Frame for on-site plaster finish. The Panel is supplied with a budget lock as standard, although other locks are available upon request, These Panels are for inspection purposes only, and are not suitable for personnel access. This panel is 2 Hour fire rated in accordance with B.S. 476: Part 22:1987.

Construction

The panel is manufactured from 0.9mm Zintec steel. The panel has a fully demountable metal faced door and is powder coated RAL 9010 30% Gloss. Other colours are available upon request. The door is fitted with a screw pin hinge and is lockable with using a standard budget lock.

Dimensions (MM)

Stock sizes, for same day despatch: 200x200, 300x300, 450x450 & 600x600
Bespoke sizes are available upon request.

Fitting

Cut out the hole using the template provided and a pad saw.
You don't need to remove the door, just open the panel using the budget key supplied,
Place the panel into the aperture.
Tighten the FlipFix device via the fixing screw behind the door leaf to clamp on to the back of the plasterboard (the FLIPFIX device covers all boards from 8mm to 32mm).
Lock the door and insert the plastic bung cover into the lock hole,
Sit back and relax, you've just saved yourself 20 minutes.

THE REVOLUTION HAS STARTED

WORLDWIDE PATENTS PENDING